



PROGRAMMABLE,
SMART & CONTRACTOR-BRANDED
THERMOSTATS

PROSTAT[™]
COMFORT CONTROL



THERMOSTATS

THE BRANDS YOU TRUST FROM THE BRAND YOU RELY ON!



Our Complete Family of ProStat Thermostats



PRS3110 – PRS3210
Non-Programmable Thermostat



PRS4110 – PRS4210
Programmable Thermostat



PRS6110 – PRS6210
Premier Universal Programmable
Thermostat



PRS6420
Premier Universal Programmable
Touchscreen Thermostat



PRS7325WF Universal Smart WiFi



BlueLink® Smart Connect Application



Table of Contents

Non-Programmable Thermostats	2
Programmable Thermostats	2
Premier Universal Programmable Thermostats	3
Thermostat Accessories	3/4
Premier Universal Programmable Touchscreen Thermostat	4
BlueLink® Smart Wi-Fi Thermostat	5
BlueLink Smart Connect® App	6
Free Contractor Branding	7
Thermostat Feature Cross Reference	8
Thermostat Cross Reference	9



Non-Programmable and Programmable Thermostats



Non-Programmable*

PRS3110 – 1 Heat / 1 Cool

PRS3210 – 2 Heat / 1 Cool



Programmable*

PRS4110 – 1 Heat / 1 Cool

PRS4210 – 2 Heat / 1 Cool

Compatibility

- Single-stage conventional or heat pump systems
- Multi-stage heat pump systems (PRS3210, PRS4210)
- Multi-stage conventional systems (PRS3210, PRS4210)
- 2-wire hydronic zone systems
- Millivolt systems

Features

- Large display with bright blue backlight
- Adjustable temperature limits for multi-family housing
- Hardwire or battery powered
- Permanent memory retains settings
- Low battery indicator
- Front access reset button
- Compressor short cycle protection
- Fahrenheit or Celsius display mode
- Adjustable temperature differential
- ESD guard™ electronic circuitry
- Trilingual packaging and instructions

Additional Features (PRS4110 / PRS4210)

- 7 day, 5-2 day or non-programmable
- Temporary program override
- Programmable extended hold mode
- Filter check monitor
- Adaptive recovery mode (ARM™)
- ROHS compliant

Complete thermostat feature comparisons on page 9



*Complete warranty details available from your local branch.



Premier Universal Programmable*

PRS6110 – 2 Heat / 1 Cool

PRS6320 – 3 Heat / 2 Cool



Wired Remote Indoor Sensor

PRS6390

- Contemporary style for any decor
- Sense remotely or average with thermostat
- Sense range of 40° to 99°F



Wired Remote Outdoor Sensor

PRS6490

- Mounts outdoors up to 200 feet away
- Enables outdoor control functions
- Sense range of -40° to 120°F

Compatibility

- Single stage conventional or heat pump systems
- Multistage heat pump systems
- Multistage conventional systems (PRS6320)
- 2 or 3 wire hydronic zone systems
- Millivolt systems

Features

- 7 day, 5-2 day or non-programmable
- Large display with bright blue backlight
- Auto or manual changeover
- Residential or commercial modes
- Hardwire or battery powered
- Permanent memory retains settings
- Circulating fan mode
- Programmable fan mode
- Separate user and installer reset buttons
- User selectable service monitors
- Indoor or outdoor remote sensing
- Temporary program override
- Programmable extended hold mode
- Adaptive recovery mode (ARM™)
- Multi-level keypad lockout
- Heat pump balance points
- Trilingual packaging and instructions
- ROHS compliant

*Complete thermostat feature
comparisons on page 9*




*Complete warranty details available from your local branch.



Premier Universal Programmable Touchscreen Thermostats and Wired Remote Sensors



Premier Universal Programmable Touchscreen*

PRS6420 – 4 Heat / 2 Cool
with Humidity Control 



Wired Remote Indoor Sensor

PRS6390

- Contemporary style for any decor
- Sense remotely or average with thermostat
- Sense range of 40° to 99°F



Wired Remote Outdoor Sensor

PRS6490

- Mounts outdoors up to 200 feet away
- Enables outdoor control functions
- Sense range of -40° to 120°F

Compatibility

- Single stage conventional or heat pump systems
- Multistage heat pump systems
- Multistage conventional systems
- 2-wire hydronic zone systems
- Millivolt systems

Features

- 7 day, 5-2 day or non-programmable
- Auto or manual changeover
- Residential and commercial modes
- Hardwire or battery powered
- Permanent memory retains settings
- Circulating and programmable fan modes
- Separate user and installer reset buttons
- User selectable service monitors
- Indoor or outdoor remote sensing
- Multi-level keypad lockout
- Temporary program override
- Programmable extended hold mode
- Adaptive recovery mode (ARM™)
- Humidification and dehumidification control
- Heat pump balance points
- Auxiliary fresh air economizer terminal
- Auxiliary heat fossil fuel option
- Trilingual packaging and Instructions
- ROHS compliant

Complete thermostat feature comparisons on page 9



*Complete warranty details available from your local branch.



Wi-Fi Remote Access from Smartphone, Tablet or PC



Universal Smart Wi-Fi*

PRS7325WF – Up to 3 Heat / 2 Cool
Up to 2 Heat / 2 Cool Conventional

Compatibility

- Single stage conventional or heat pump systems
- Multistage heat pump systems
- Multistage conventional systems
- No common (C) wire required for Wi-Fi on most systems.**

Features

- 7 day, 5-2 day or non-programmable
- Large 3 sq. in. backlit display
- Bright blue backlight
- Auto or manual changeover
- User and installer lock modes
- SmartLimit™ temperature limits
- Auxiliary heat fossil fuel option
- Hardwire or battery powered
- Circulating fan mode
- ROHS compliant

** Wi-Fi works without common (C) wire on most systems; requires common (C) wire on heat pump, heat only or cool only systems

Complete thermostat feature comparisons on page 9




*Complete warranty details available from your local branch.



Application features

- Compatible with virtually all smart phones, tablets or computers when connected to the internet
- Multi-color program groups help simplify scheduling
- Text and email service and temperature alerts
- BlueLink QuickCopy® allows user to duplicate program and configuration to other thermostats
- QuickEdit® makes schedule changes easy
- BlueLink SmartData® energy report capability
- Monitor and control multiple thermostats
- Easy access dealer information
- Help screens guide user through application
- Optional geofencing for increased energy savings

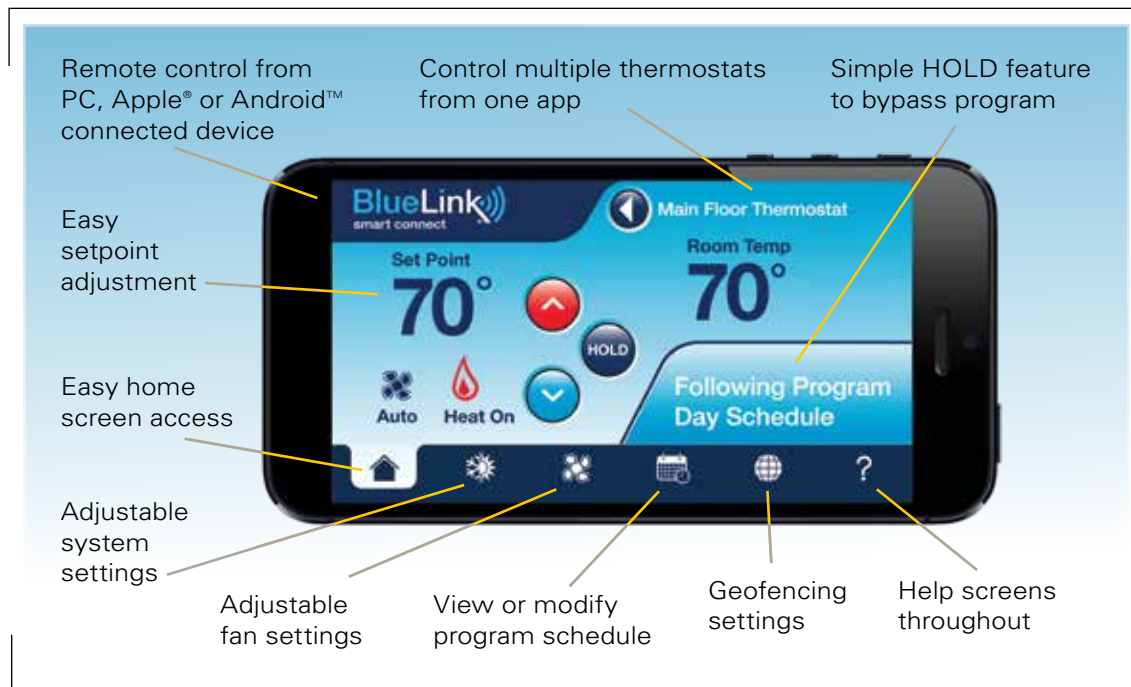

Compatible with Amazon Alexa

Amazon Alexa is a trademark of Amazon.com, Inc.



BlueLink Application Help Available:
www.bluelinksmartconnect.com
Requires iOS or Android™ to connect



FREE contractor-branded thermostat doors and branded cards

With **ProStat** Comfort Controls, there are no minimum purchase requirements for the contractor to advertise 24 hours a day in customers' homes. Company name and contact information will be readily available when it is time for maintenance or equipment repair.

Participating contractors can permanently pad print up to 3 lines of text (30 characters per

line) on **ProStat** Comfort Control's removable doors. Non-branded quick reference cards are already included with our thermostats.

For custom-branded cards, simply send a file of your company's logo to contractorbranding@prostatbranding.com. Upon receipt and verification, you will receive the custom-printed cards absolutely FREE.

EASY ORDERING

Pad printed doors

- Commit to purchasing **ProStat** thermostats from your local distributor.
- Fill out the Contractor Branding Services Form available at your local branch and fax to 1-866-268-8897 or e-mail to: contractorbranding@prostatbranding.com.
- After placement of order, you will receive 50 contractor-branded doors absolutely FREE, with no set-up fees or separate branding charges.
- Please allow 2-3 weeks for delivery.



Permanent pad printing on removable thermostat doors

Full-color instruction cards

- Commit to purchasing **ProStat** thermostats from your local distributor.
- Fill out the Contractor Branding Services Form available at your local branch and fax to 1-866-268-8897 or e-mail to: contractorbranding@prostatbranding.com.
- Email a high resolution logo in TIF, JPG or EPS format (see form for instructions).
- Contractors will receive 50 full color Contractor Branded Quick Reference Cards for FREE, with no set-up fees or branding charges.
- Please allow 2-3 weeks for delivery.





Thermostat Features

		PRS3110	PRS3210	PRS4110	PRS4210	PRS6110	PRS6320	PRS6420	PRS7325WF
STAGING	Conventional	1/1	2/1	1/1	2/1	1/1	2/2	3/2	2/2
	Heat Pump	1/1	2/1	1/1	2/1	2/1	3/2	4/2	3/2
PROGRAM	7 Day	•	•	•	•	•	•	•	•
	5-2 Day			•	•	•	•	•	•
	Non-Prog.			•	•	•	•	•	•
APPLICATION	Electric	•	•	•	•	•	•	•	•
	Gas or Oil	•	•	•	•	•	•	•	•
	Heat Pump	•	•	•	•	•	•	•	•
	Millivolt	•	•	•	•	•	•	•	•
	Hydronic Systems 2 or 3 Wire	2	2	2	2	2/3	2/3	2	2
	Battery / Hardwire	•	•	•	•	•	•	•	•
	Wi-Fi								•
FUNCTIONS AND FEATURES	Display Size (sq. in.)	2	2	2	2	5	5	12	3
	Blue Backlight	•	•	•	•	•	•	•	•
	Adjustable Differential(s)	•	•	•	•	•	•	•	•
	Permanent Memory	•	•	•	•	•	•	•	•
	Reset Button(s)	•	•	•	•	•	•	•	•
	Adaptive Recovery Mode (ARM™)			•	•	•	•	•	•
	Circulating Fan					•	•	•	•
	Service Monitor(s)			•	•	•	•	•	•
	Auto Changeover					•	•	•	•
	Keypad Lockout					•	•	•	•
	Temperature Limits	•	•	•	•	•	•	•	•
	Indoor/Outdoor Remote Sensing					•	•	•	
	Dual Fuel Capable					•	•	•	•
	Programmable Fan					•	•	•	
	Balance Points					•	•	•	
	Residential and Commercial Modes					•	•	•	
	Humidity Control							•	
	Economizer Control							•	



ProStat Model	Honeywell® Model	Emerson® Model	Pro1® Model	Ventstar® Model	Lux® Model
PRS3110	TH110DV TH1110DH TH1110D TH3110D	1E78-144 1F78-144 1F86-0244 1F86EZ-0251	T601-02 T701	T0130	PSD111 PSD011B P111
PRS3210	TH1210DV TH1210DH TH3210D	1F79-111 1F89-0211 1F89EZ-0251	T621-2 T721	T0140	PSDH121 PSDH021W
PRS4110	TH2110DV TH2110DH TH4110D TH4110U*	1E78-151 1F78-151 1F80-361 1F80-0224 1F80-0261	T605 T705	T1035 T1010* T1050* T1700	P521U PH521 PSP511LC P711
PRS4210	TH2210DV TH2210DH TH4210D TH4210U	1E78-151 1F78-151 1F80-361 1F80-0224 1F80-0261	T715 T725	T1045	P621U P721 P722U PSP721U
PRS6110	TH5110D TH6110D TH6210U	1F86-0471 1F80-0471 1F85-0422 1F83C-11NP 1F83H-21NP 1F83C-11PR 1F83H-21PR	T801 T805	T1700* T2700*	PSPS711
PRS6320	TH5220D TH5320U TH6220D TH6220U* TH6320U*	1F83-0422 1F83-0471 1F85-0477 1F95EZ-0671 1F95-0680* 1F95-0671 1F95-0671 1F85U-22NP 1F85U-42NP* 1F85U-22PR 1F85U-42PR*	T755 T7555 T855 T8555	T1800* T1900* T2800* T2900*	PSP722E
PRS6420	TB7100U TB7220U TH8110R* TH8320R* TH8321R*	1F97-1277 1F95-1277 1F95-1280* 1F95-1291	T905 T955 T955S	T7800* T8800*	PSP711TS PSPU721T PSPU732T P721UT
PRS7325WF	TH6220WF* TH6320WF* TH8320WF* TH8321WF*	1F86U-42WF	T701i T855i	T2000* T2050* T3700* T3800* T4700*	GEO-BL GEO-WH

* Verify specific feature requirements before substitution. Product specifications may change without notice.



PRO TO GO!

THE BRANDS YOU TRUST FROM THE BRAND YOU RELY ON!